

NOTES :

1. MATERIAL:H-K9L
Nd:1.516797± 0.0005
Vd:64.212351± 0.5%

2. INTERPRET OPTICAL TOLERANCES PER
ISO 10110

3. COAT TWO SURFACES AS FOLLOWS:


Rabs <0.5% AT 430-650nm
450nm T > 98.7% (FAI check)
540nm T > 98.7% (FAI check)
630nm T > 98.7% (FAI check)

4. Coatings test methods per ISO 9211-4
Abrasion : degree of severity 04 x 1
Adhesion : degree of severity 03 x 3

5. SURFACE QUALITY:60-40,SCRATCH AND
DIG PER MIL-PRF-13830B

6. R1,R2 coating range>CA+0.2

7.  The main inspection dimension

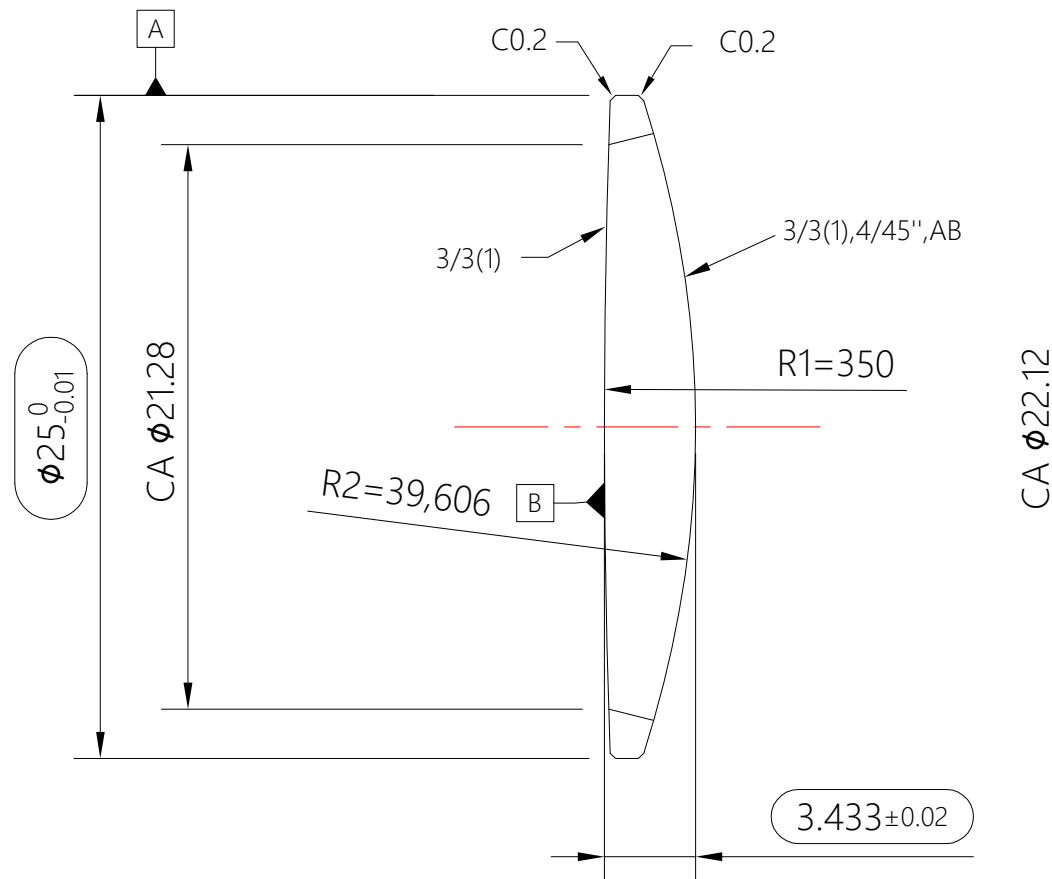

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 25mm Dia., 3.433mm Thk. Double-Convex Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No.	1C019	Rev.	01
free	mm	A4	1/1					