


NOTES :

1. MATERIAL:H-FK61
Nd:1.496998±0.0005
Vd:81.59470±0.8%
2. INTERPRET OPTICAL TOLERANCES PER ISO 10110
3. COAT TWO SURFACES AS FOLLOWS:
Rabs<0.5% AT 430-650nm
450nm T > 98.0%
540nm T > 98.5%
630nm T > 98.5%
4. COATINGS SHALL MEET FOLLOW ISO 9211-4
ABRASION: DEGREE OF SEVERITY 04x1
ADHESION: DEGREE OF SEVERITY 03x3
(USING 3M TYPE-600)
5. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B
6. Coating range R1>φ21.3
R2>φ21.3
7.  The main inspection dimension

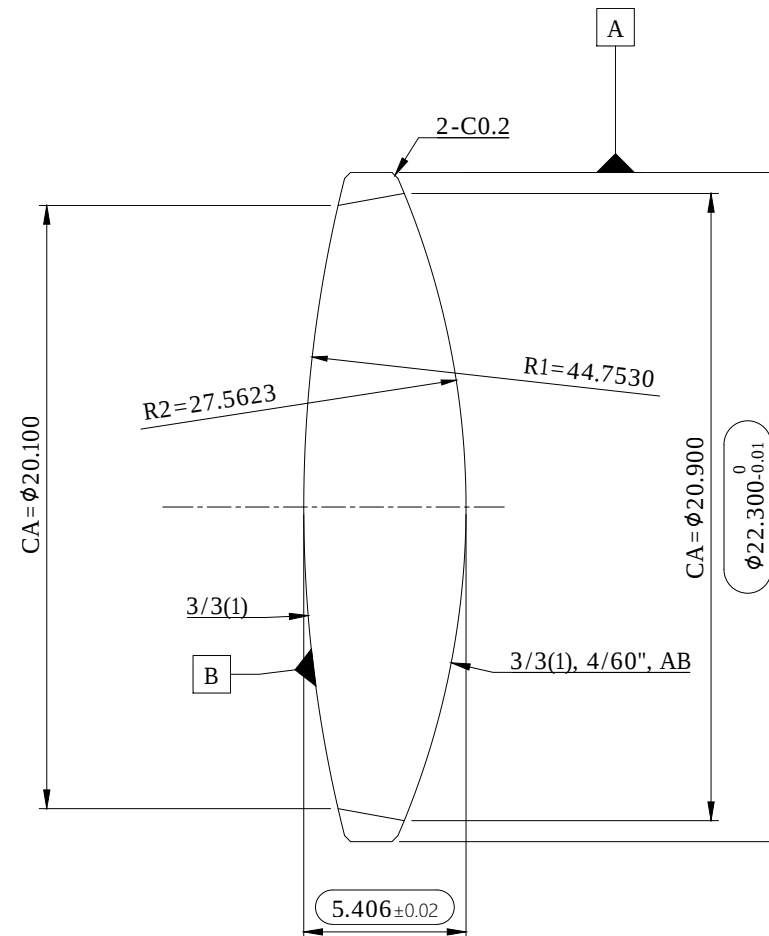

SV 上陽光學
SUN YANG OPTICS

Material: See note		Surface Finish: See Note			TITLE: 22.3mm Dia., 5.406mm Thk. Double-Convex Lens			
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1C012	Rev.	01	