

NOTES :

1. MATERIAL:H-FK61
Nd:1.496998±0.0005
Vd:81.59470±0.8%

2. INTERPRET OPTICAL TOLERANCES PER ISO 10110

3. COAT TWO SURFACES AS FOLLOWS:

Rabs<0.5% AT 430-650nm

450nm T > 98.0%

540nm T > 98.5%

630nm T > 98.5%

4. COATINGS SHALL MEET FOLLOW ISO 9211-4

ABRASION: DEGREE OF SEVERITY 04x1


ADHESION: DEGREE OF SEVERITY 03x3

(USING 3M TYPE-600)

5. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B

6. Coating range R1 >φ21.3
R2 >φ21.3

7.  The main inspection dimension

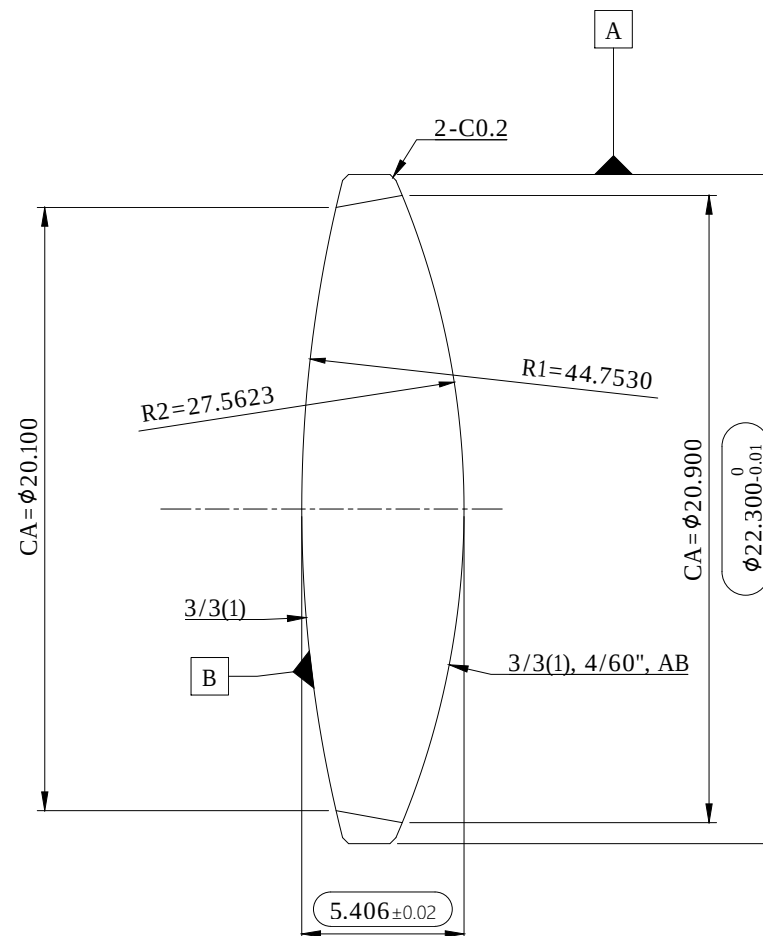

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 22.3mm Dia., 5.406mm Thk Double-Convex Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No.		Rev.	
free	mm	A4	1/1					

1C013

01