


# NOTES :

1. MATERIAL:H-ZLAF  
Nd:1.800999±0.0005  
Vd:34.9721±0.8%
2. INTERPRET OPTICAL TOLERANCES PER ISO 10110
3. COAT TWO SURFACES AS FOLLOW  
Rabs<0.5% AT 430-650nm  
450nm T > 96.5%  
540nm T > 98.0%  
630nm T > 98.0%
4. COATINGS SHALL MEET FOLLOW ISO 9211-4  
ABRASION: DEGREE OF SEVERITY 04x1  
ADHESION: DEGREE OF SEVERITY 03x3  
(USING 3M TYPE-600)
5. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B
6. Coating range R1> ø25.80  
R2 >ø25.80
7.  The main inspection dimension

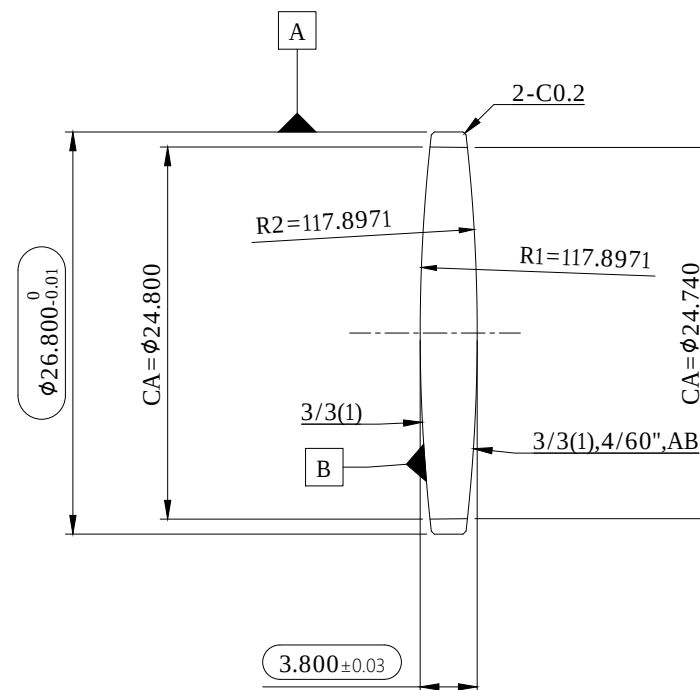

**SV** 上陽光學  
SUN YANG OPTICS

TITLE: 26.8mm Dia., 3.8mm Thk.  
Double-Convex Lens

|           |       |                 |        |                                                                                       |                                                      |      |    |  |
|-----------|-------|-----------------|--------|---------------------------------------------------------------------------------------|------------------------------------------------------|------|----|--|
| Material: |       | Surface Finish: |        |  | TITLE: 26.8mm Dia., 3.8mm Thk.<br>Double-Convex Lens |      |    |  |
| See note  |       | See Note        |        |                                                                                       |                                                      |      |    |  |
| Scale:    | Unit: | Size:           | Sheet: |                                                                                       |                                                      |      |    |  |
| free      | mm    | A4              | 1/1    | Stock No.                                                                             | 1C024                                                | Rev. | 01 |  |