

NOTES :

1. MATERIAL:H-K9L
Nd:1.5167977±0.0005
Vd:64.2124±0.8%

2. INTERPRET OPTICAL TOLERANCES PER
ISO 10110


3. COAT TWO SURFACES AS FOLLOWS:
Rabs<0.5% AT 430-650nm
450nm T > 98.0% (FAI check)
550nm T > 98.5% (FAI check)
630nm T > 98.5% (FAI check)

4. COATINGS SHALL MEET FOLLOW ISO 9211-4
ABRASION: DEGREE OF SEVERITY 04x1
ADHESION: DEGREE OF SEVERITY 03x3
(USING 3M TYPE-600)

5. SURFACE QUALITY:60-40,SCRATCH AND DIG
PER MIL-PRF-13830B

6. Coating are R1>Ø24.90 mm
R2>Ø25.90mm

7.  The main inspection dimension

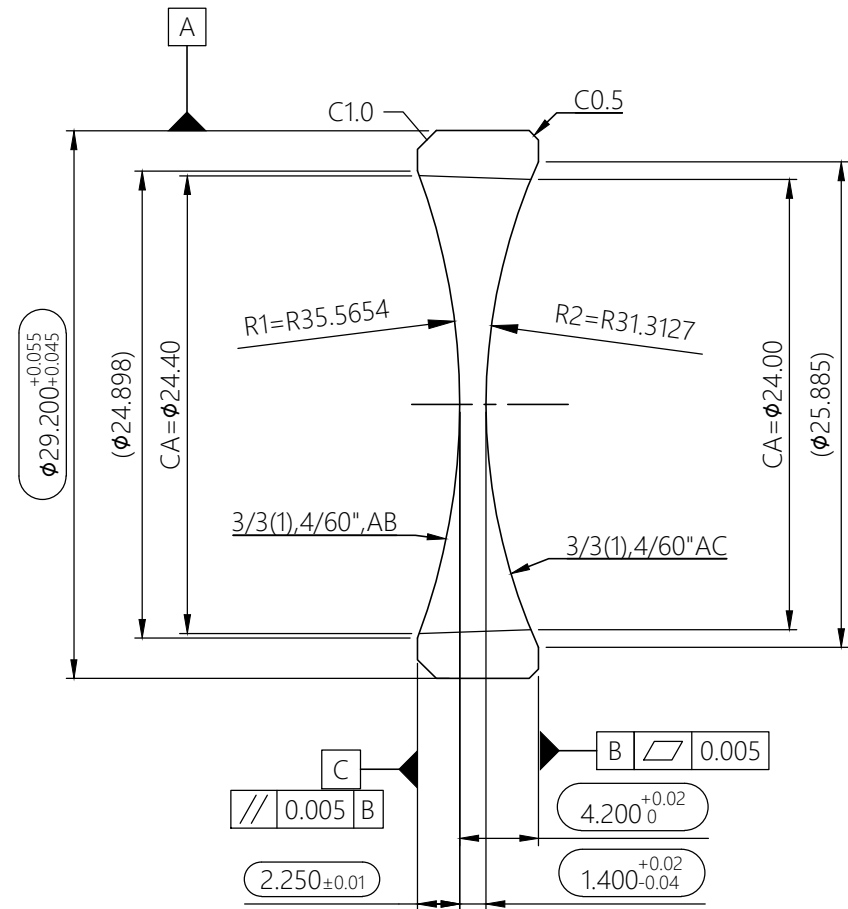

SY 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 29.2mm Dia., 1.4mm Thk. Double-Concave Lens		
See note	See Note				
Scale:	Unit:	Size:	Sheet:	Stock No.	Rev.
free	mm	A4	1/1	1E005	01