

NOTES :

1. Material : S-TIM35

Nd : 1.69894 ± 0.0005

Vd : $30.127865 \pm 0.8\%$

2. Interpret optical tolerance per ISO 10110

3. Coat R1&R2 surface as follows :

Tave>97% AT 420-483nm

Tave>98.5% AT 483-680nm

Tabs>95% AT 420-483nm

Tabs>96% AT 483-680nm

Pave<0.5% AT 420-680nm

Pabs<1% AT 420-68nm

4. Coating area R1> $\phi 11.46$

R2> $\phi 14.00$


5. Coatings test methods per ISO 9211-4

Abrasion : degree of severity 04 x 1

Adhesion : degree of severity 03 x 3

6. Surface quality 60-40 per MIL-PRF-13830B

7.  The main inspection dimension

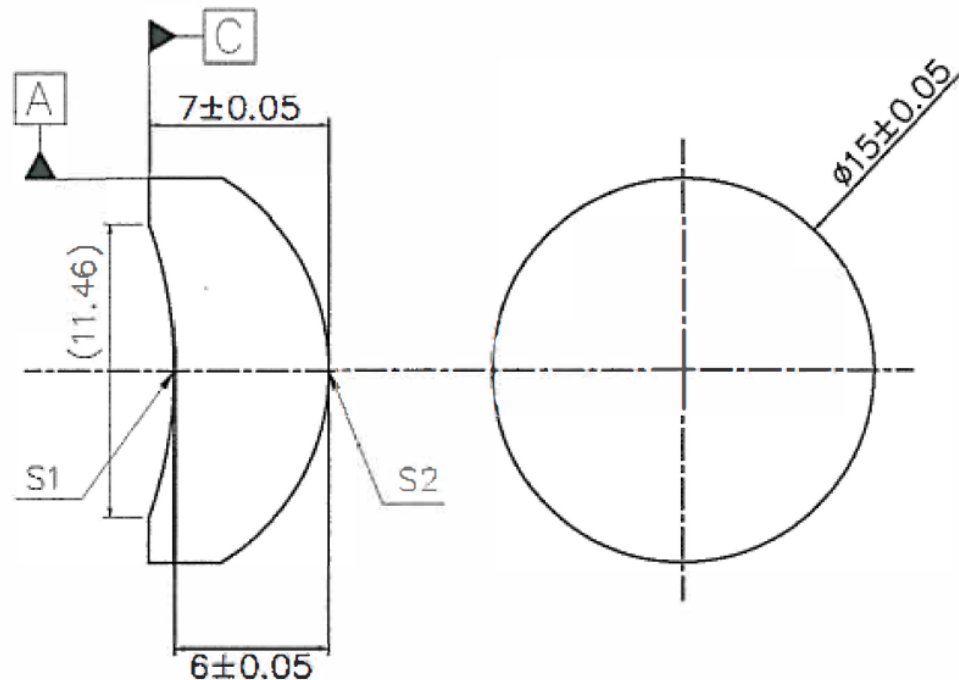

SY 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 15mm Dia., 6mm Thk. Diverging Meniscus Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1F010	Rev. 01
free	mm	A4	1/1			