


NOTES :

1. Glass type : blue glass
2. Interpret optical tolerance per ISO 10110
3. Coat S1 surface as follows :
 $T_{avg} > 90\%$ AT 430~565nm
 $T_{min} > 85\%$ AT 430~565nm
 $T = 50\%$ AT 410±10nm
 $T = 50\%$ AT 650±10nm
 $T_{avg} < 5\%$ AT 700~725nm
 $T_{max} < 1.5\%$ AT 725~1100nm
 $T_{avg} < 0.5\%$ AT 725~1100nm
4. COATINGS SHALL MEET ADHESION
 USING 3M TYPE-600 TAPE AND 1KG
 MIL-E-12379B RUBBER TEST
5. Surface quality 60-40 per MIL-PRF-13830B
6.  The main inspection dimension

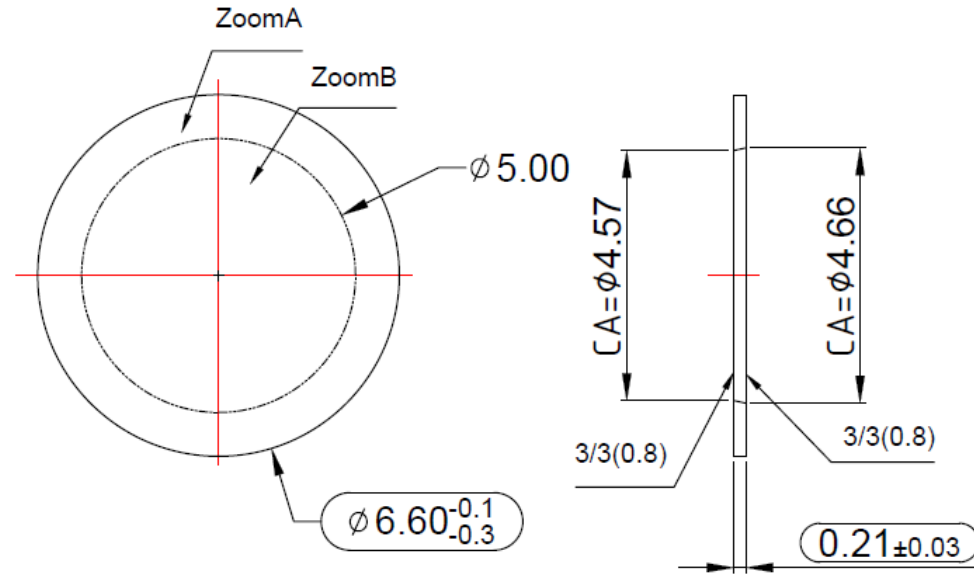

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 6.6mm Dia., 0.21mm Thk. IR Filter			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	3E002	Rev.	01	