

NOTES :

1. MATERIAL:H-ZF3 / H-FK61

2. INTERPRET OPTICAL TOLERANCES PER ISO 10110 3. COAT

TWO SURFACES AS FOLLOWS:

R(abs.)<0.5% AT 430-650nm

T(Abs.)>97.0% AT 450nm


T(Abs.)>97.0% AT 550nm

T(Abs.)>97.0% AT 630nm

4. COATINGS SHALL MEET ADHESION USING 3M TYPE-600
TAPE AND 1KG MIL-E-12379B RUBBER TEST

5. SURFACE QUALITY:60-40,SCRATCH AND DIG
PER MIL-PRF-13830B

6.  The main inspection dimension

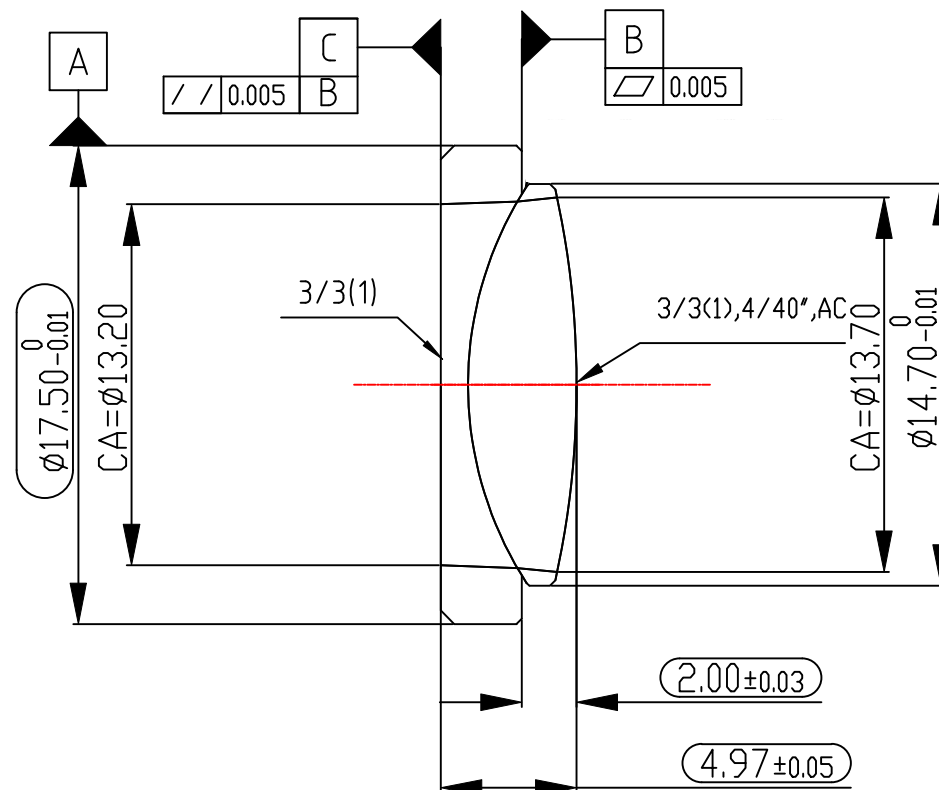

SY 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 17.5mm Dia., 4.97mm Thk. Achromatic Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:	Stock No.	1A018	Rev.	01	
free	mm	A4	1/1					

NOTES:

1.MATERIAL:H-ZF3

Nd:1.717361± 0.0005

Vd:29.509994± 0.5%

2.INTERPRET OPTICAL TOLERANCES PER ISO 10110


3.COAT R1 SURFACES AS FOLLOWS:

R(abs.)<0.5% AT 430-650nm

4.COATINGS SHALL MEET ADHESION USING 3M TYPE-600
TAPE AND 1KG MIL-E-12379B RUBBER TEST

5.SURFACE QUALITY:60-40,SCRATCH AND DIG
PER MIL-PRF-13830B

6.  The main inspection dimension

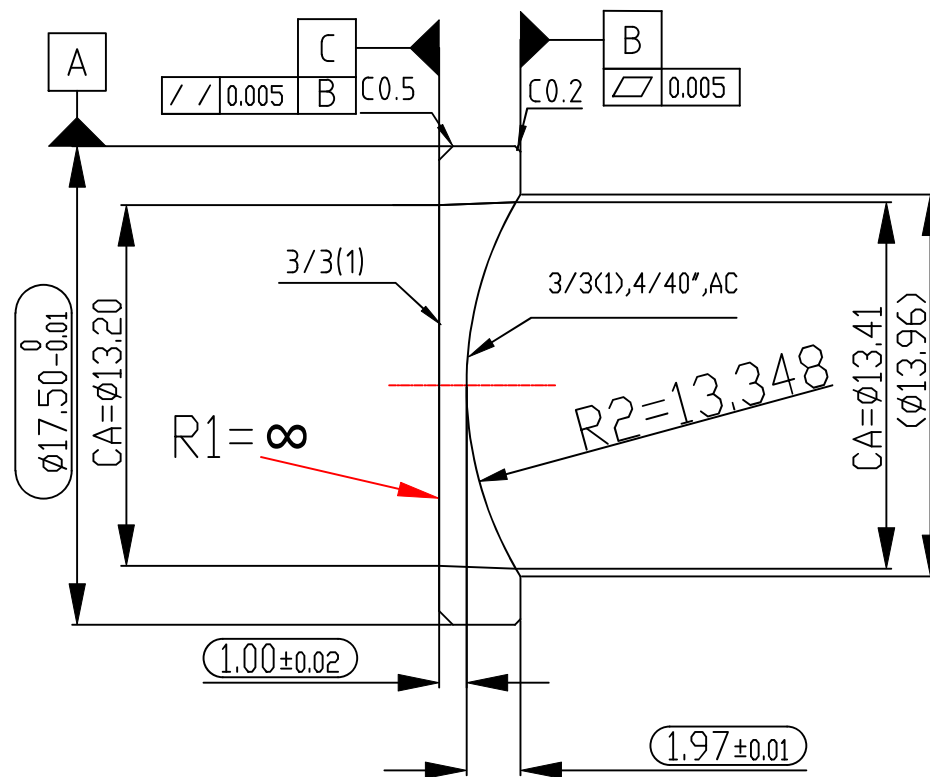

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 17.5mm Dia., 1.0mm Thk. Plano-Convex Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No. 1A018 Rev. 01			
free	mm	A4	1/1					

NOTES:

1.MATERIAL:H-FK61

Nd:1.496998± 0.0005

Vd:81.594687± 0.8%

2.INTERPRET OPTICAL TOLERANCES PER
ISO 10110


3.COAT R2 SURFACES AS FOLLOWS:

R(abs.)<0.5% AT 430-650nm

4.COATINGS SHALL MEET ADHESION USING 3M
TYPE-600 TAPE AND 1KG MIL-E-12379B

5.SURFACE QUALITY:60-40,SCRATCH AND DIG
PER MIL-PRF-13830B

6.  The main inspection dimension

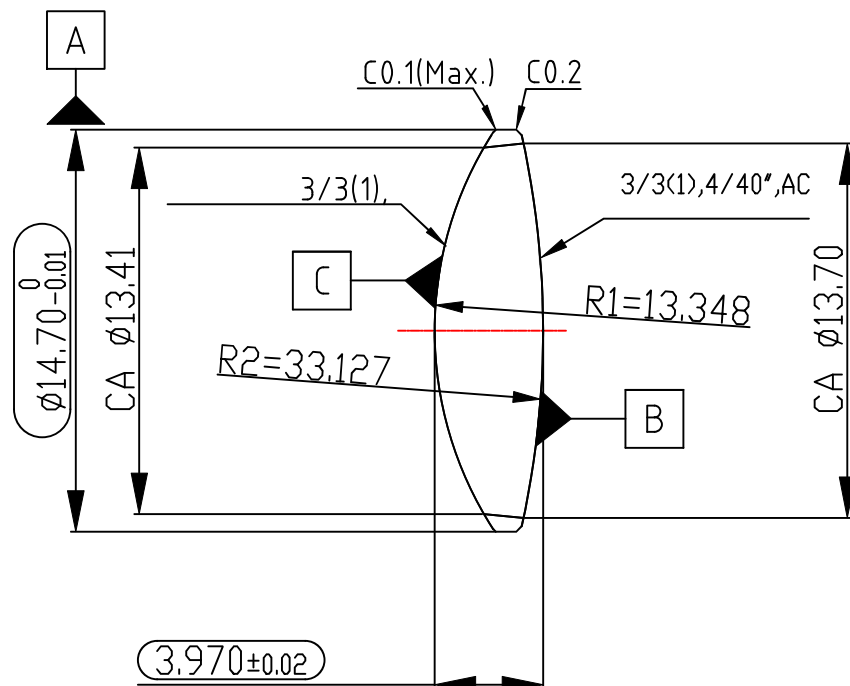

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 14.7mm Dia., 3.97mm Thk. Double-Convex Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No. 1A018 Rev. 01			
free	mm	A4	1/1					