


NOTES :

1. Material : H-ZPK1A / H-ZF6
2. Interpret optical tolerance per ISO10110
3. Coat R1 & R2 surface as follow:
R (abs.) < 0.5% AT 420-680nm
T (abs.) > 97.75% AT 420-680nm
4. Coating area R1> $\phi 17.0$; R2 > $\phi 15.3$
5. Coatings test methods per ISO 9211-4
Abrasion : degree of severity 04 x 1
Adhesion : degree of severity 03 x 3
6. Surface quality 60-40 per MIL-PRF-13830B
7.  The main inspection dimension

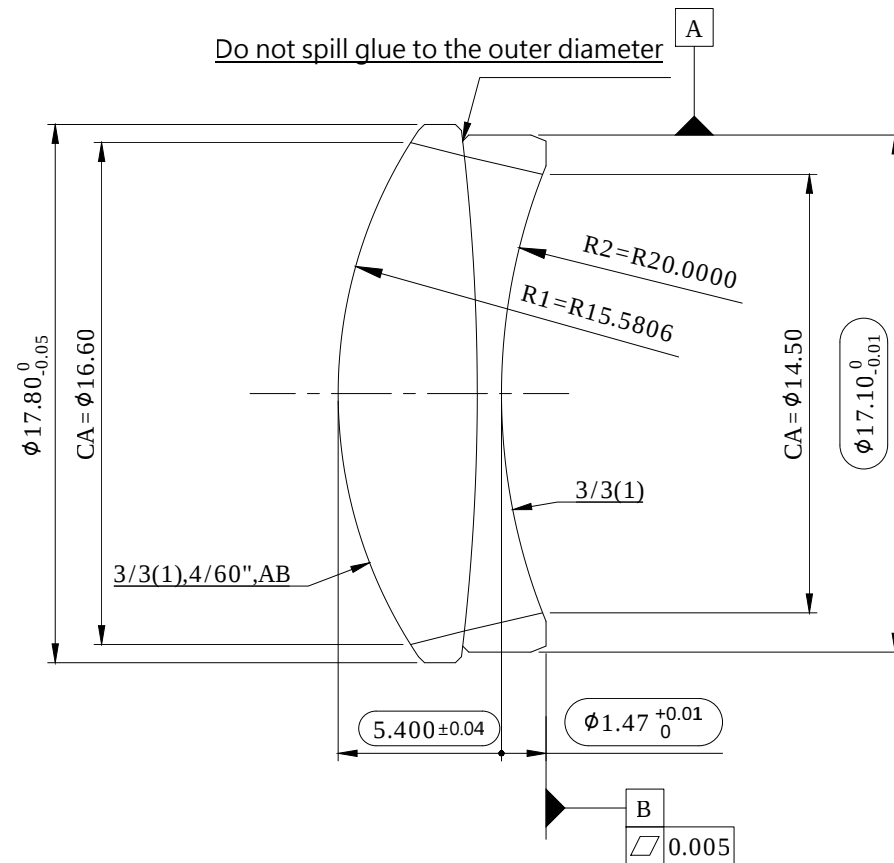

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 17.8mm Dia., 5.4mm Thk. Achromatic Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No. 1A019 Rev. 01			
free	mm	A4	1/1					

NOTES:

1. Material : H-ZPK1A

Nd:1.617998±0.0005

Vd:63.405767±0.8%

2. Interpret optical tolerance per ISO 10110

3. Coat R1 surface as follows :
R (abs.) < 0.5% AT 420-680nm

4. Coating area : R1 > Ø1 7.0


5. Coatings test methods per ISO 9211-4

Abrasion : degree of severity 04 x 1

Adhesion : degree of severity 03 x 3

6. Surface quality 60-40 per MIL-PRF-13830B

7.  The main inspection dimension

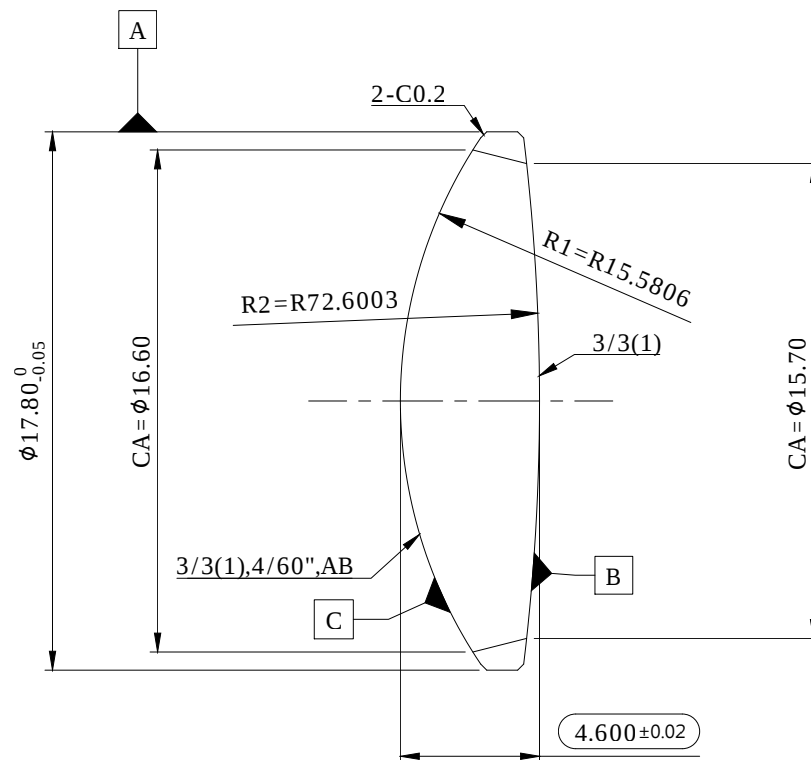

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 17.8mm Dia., 4.6mm Thk. Double-Convex Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1A019	Rev. 01
free	mm	A4	1/1			

NOTES:

1.Material : H-ZF6
Nd:1.755205±0.0005
Vd:27.547441±0.8%

2.Interpret optical tolerance per ISO 10110


3.Coat R2 surface as follows :
R (abs.) < 0.5% AT 420-680nm

4.Coating area : R2 > Ø1 5.3

5.Coatings test methods per ISO 9211-4
Abrasion : degree of severity 04 x 1
Adhesion : degree of severity 03 x 3

6.Surface quality 60-40 per MIL-PRF-13830B

7.  The main inspection dimension

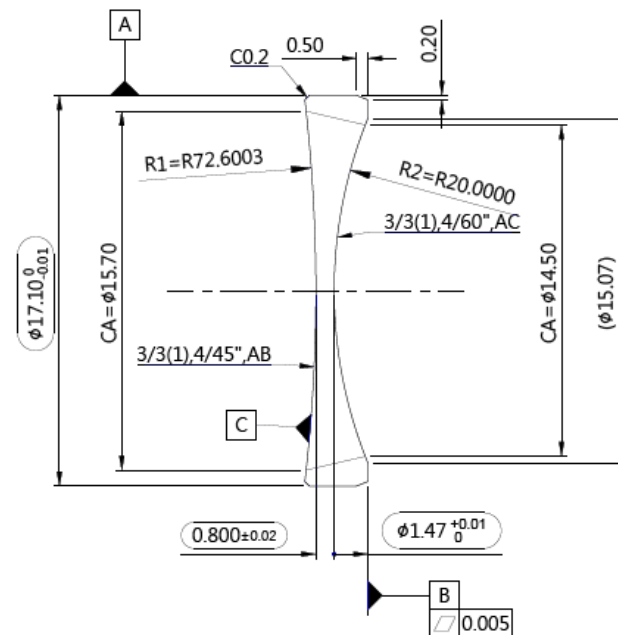

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 17.1mm Dia., 0.8mm Thk. Double-Concave Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1A019	Rev. 01
free	mm	A4	1/1			