


NOTES :

1. MATERIAL:H-ZF6 / H-ZLAF5
2. INTERPRET OPTICAL TOLERANCES PER ISO 10110
3. COAT TWO SURFACES AS FOLLOW
Rabs<0.5% AT 430-650nm
450nm T > 95.0%
540nm T > 97.0%
630nm T > 97.0%
4. COATINGS SHALL MEET FOLLOW ISO 9211-4
ABRASION: DEGREE OF SEVERITY 04x1
ADHESION: DEGREE OF SEVERITY 03x3
(USING 3M TYPE-600)
5. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B
6.  The main inspection dimension

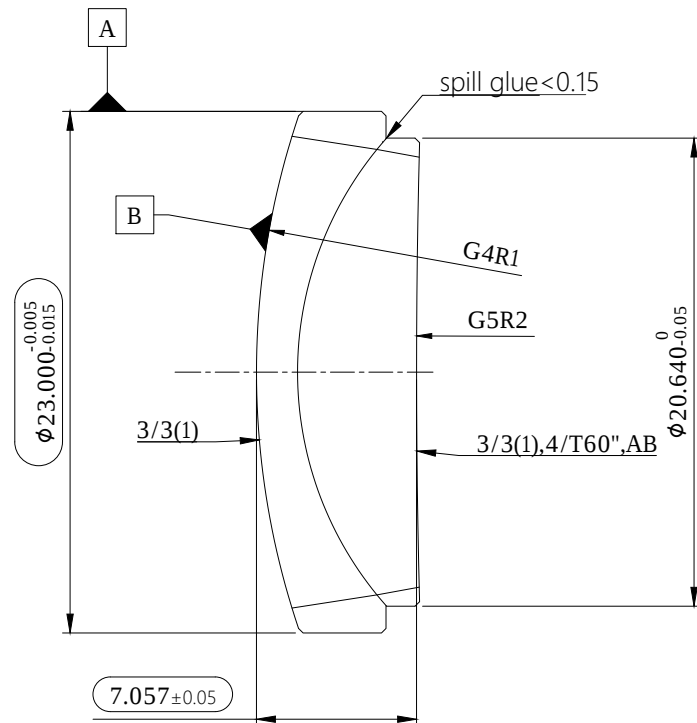

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 23mm Dia., 7.057mm Thk. Achromatic Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1A026	Rev.	01	

NOTES:

1.MATERIAL:H-ZF6

Nd:1.755205±0.0005

Vd:27.5474±0.5%

2.INTERPRET OPTICAL TOLERANCES PER ISO 10110

3.COAT R1 SURFACES AS FOLLOWS:

Rabs<0.5% AT 430-650nm

4.COATINGS SHALL MEET FOLLOW ISO 9211-4

ABRASION: DEGREE OF SEVERITY 04x1


ADHESION: DEGREE OF SEVERITY 03x3

(USING 3M TYPE-600)

5.SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B

6.R1 Coating Range >Ø2 2

7.  The main inspection dimension

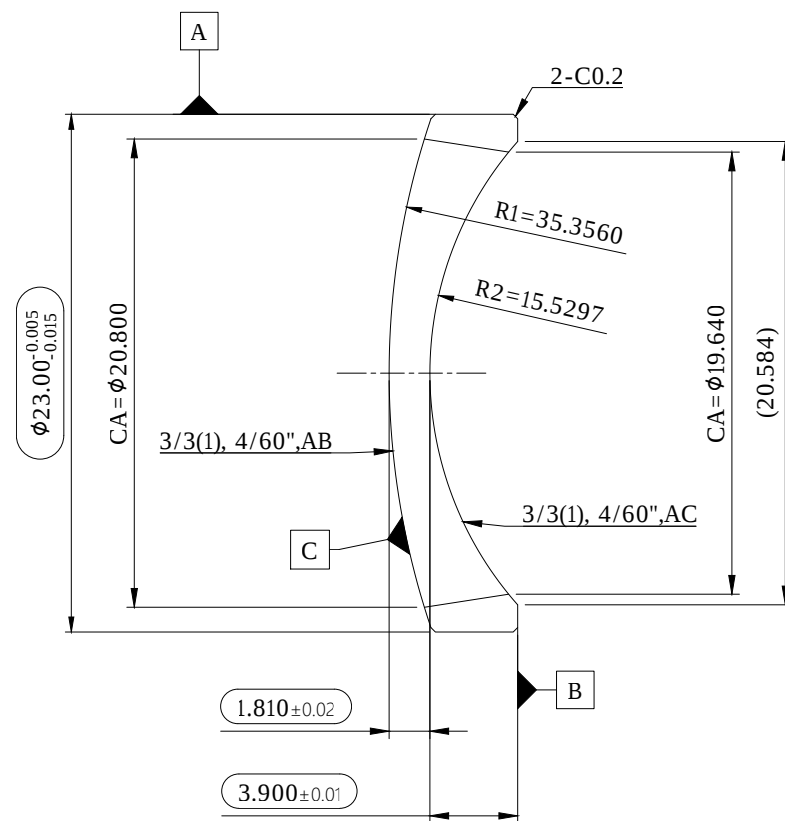

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 23mm Dia., 1.81mm Thk. Diverging Meniscus Lens		
See note	See Note				
Scale:	Unit:	Size:	Sheet:	Stock No.	Rev.
free	mm	A4	1/1	1A026	01

NOTES:

1.MATERIAL:H-ZLAF56B

Nd:1.806105±0.0005

Vd:33.2869±0.5%

2.INTERPRET OPTICAL TOLERANCES PER ISO 10110

3.COAT R2 SURFACES AS FOLLOWS:

Rabs<0.5% AT 430-650nm

4.COATINGS SHALL MEET FOLLOW ISO 9211-4

ABRASION: DEGREE OF SEVERITY 04x1


ADHESION: DEGREE OF SEVERITY 03x3

(USING 3M TYPE-600)

5.SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B

6.R2 Coating range >Ø19.64

7.  The main inspection dimension

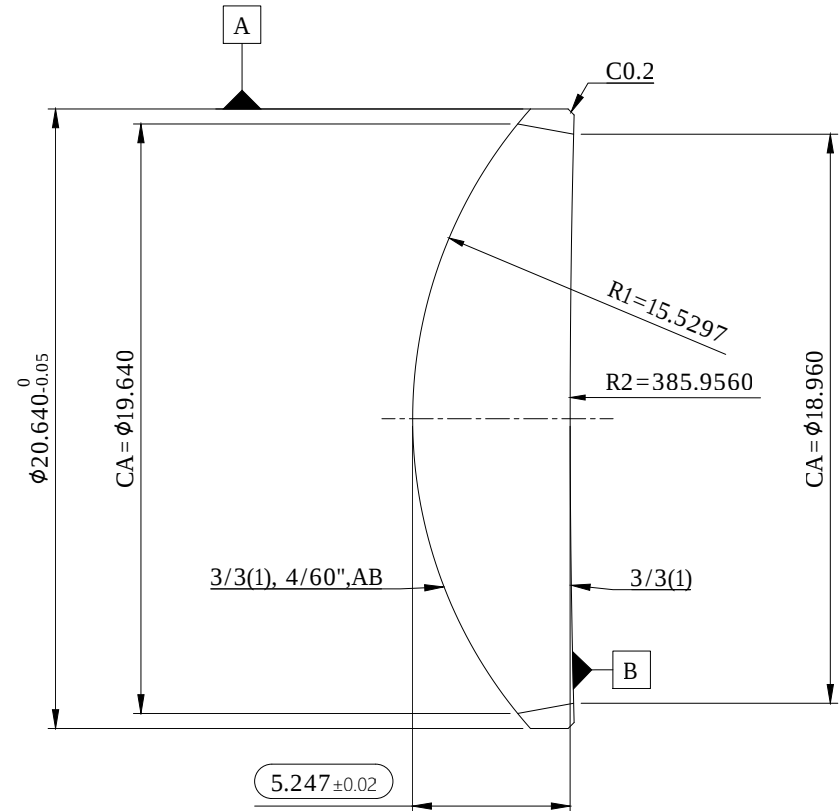

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 20.64mm Dia., 5.247mm Thk. Diverging Meniscus Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:		Stock No. 1A026 Rev. 01			
free	mm	A4	1/1					